


S. 12-401

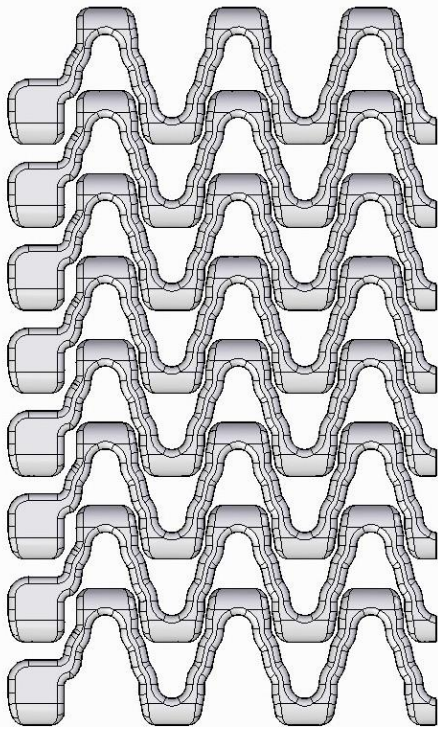

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	600	3,5
Polypropylene (PP)	800	3,5
Polyacetal (POM)	1450	4,8

Belt surface:	Open belt with a smooth surface.
Open area:	40%. Biggest opening 6 x 8 mm.
Strength:	Ideal choice for light transportation.
Material/colour:	PE/nat and blue, PP/white and grey. POM/blue
Cleanability:	Excellent. FSIS
Accessories:	25 mm. Flight, friction top
Application:	Cooling belt for small nose bar.
Standard widths:	Increments of 20 mm, e.g. 100, 120 mm etc

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
10	50	42	33	12	20			
19	84	76	67	12	20/25/30/40		25/40	1½
24	104	96	87	12	20/25/30/40		25/40	1½
28	120	112	103	12	20/25/30/40		25/40	1½

