


S. 25-100

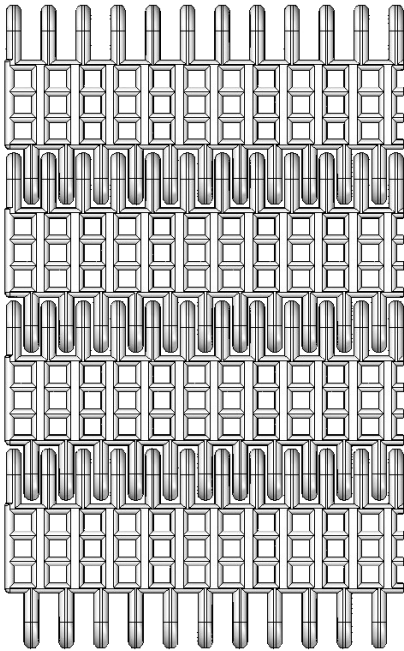

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	540	4,5
Polypropylene (PP)	740	4,5
Polyacetal (POM)	1250	6

Belt surface:	Open belt with a smooth surface.
Open area:	20 %. Biggest opening 3 x 3 mm.
Strength:	Ideal choice for light transportation.
Material/colour:	PE/nat and blue, PP/white and grey. POM/blue
Cleanability:	Good.
Accessories:	5, 25 and 50 mm flights, 25 and 50 mm side guards. 25 and 50 mm friction flights.
Application:	Catering, dairy, snacks and seafood industry.
Standard widths:	Increments of 6 mm, e.g. 100, 106 mm etc

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	59	50	41	40	20		40	1½
12	106	97	88	40	25/30/40		40	1½
20	172	161	152	40	25/30/40		40/60	1½

