


## S. 25-700

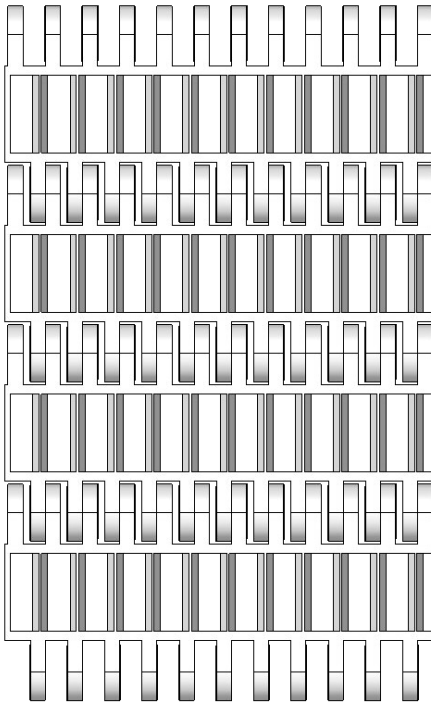

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	540	4
Polypropylene (PP)	740	4
Polyacetal (POM)	1250	6

**Belt surface:** Open belt with a smooth surface..  
**Open area:** 27 %. Biggest opening 3 x 12 mm.  
**Strength:** An ideal choice for light transportation.  
**Material/colour:** PE/nat and blue, PP/white and grey. POM/blue  
**Cleanability:** Good. FSIS  
**Accessories:** 5, 25 and 50 mm flights, 25 and 50 mm side guards.  
**Application:** Vegetables, bakery, seafood, poultry and other industries. Even as cooling/freezing belt.  
**Standard widths:** Increments of 6 mm, e.g. 100, 106 mm etc

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	59	50	41	40	20			
12	106	97	88	40	25/30/40		40	1½
20	170	161	152	40	25/30/40		40/60	1½

