


S. 25-400F/2 component

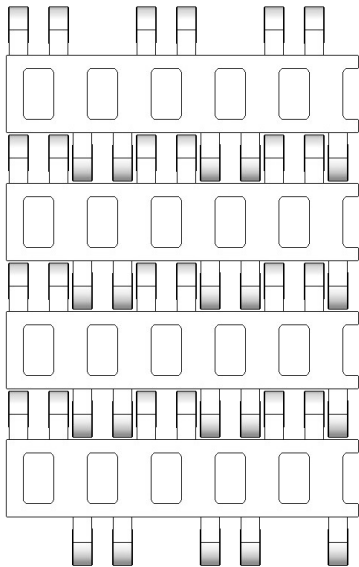

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Copolymer:	900	7

Belt surface: Friction surface.
Open area: 29 %. Biggest opening 6 x 10 mm.
Strength: Ideal for medium weight transportation.
Colour: nat/white/blue.
Cleanability: Excellent. FSIS
Accessories: 3,25 and 50 mm flights, 25 and 50 mm side guards
Application: Transport of packed goods on a slightly inclined conveyor.
Standard widths: Increments of 25 mm, e.g. 100, 125 mm etc
Non standard widths: Increments of 12,5 mm, e.g. 100, 112,5 mm etc
 Note: Non standard widths will have cut edge on one side.

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	58	45	36	20	20			
8	74	61	52	20	20/25	1	25	
12	108	95	86	20	20/25/30/40	1/1¼	25/40	1½
20	173	160	151	35	25/30/40	1/1¼	25/40/60	1½/2½

