


**S. 25-412**

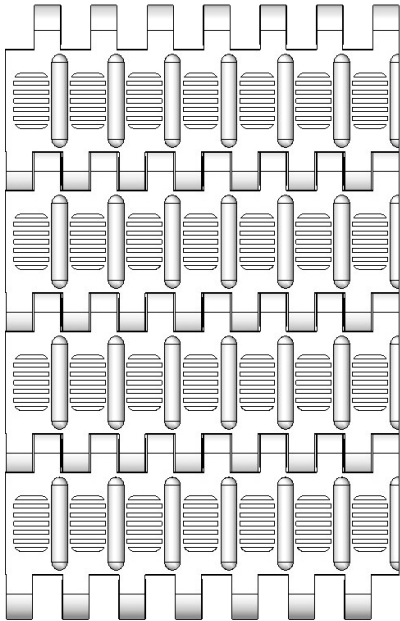

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	900	6
Polypropylene (PP)	1250	6
Polyacetal (POM)	2400	9

**Belt surface:** Open net-like belt with 2,5 mm flights.  
**Open area:** 13 %. Biggest opening 1 x 6 mm.  
**Strength:** Ideal for medium weight transportation.  
**Material/colour:** PE/nat, PP/white and grey. POM/blue  
**Cleanability:** Good. FSIS  
**Accessories:** 3, 25 and 50 mm flights, 25 and 50 mm side guards.  
**Application:** Fish, meat, vegetables etc. Suitable for blanching belts and boiling of noodles.  
**Standard widths:** Increments of 10 mm, e.g. 100, 110 mm etc

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	57	45	36	20	20			
8	75	61	52	20	20/25	1	25	
12	108	95	86	20	20/25/30/40	1/1¼	25/40	1½/2½
20	173	160	151	35	25/30/40	1/1¼	25/40/60	1½

