


S. 25-420

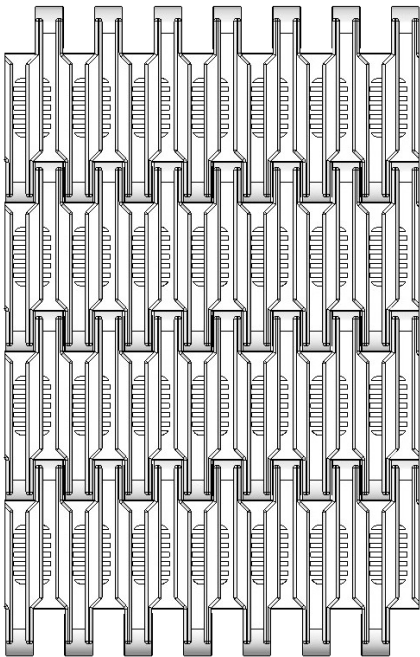

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	900	8
Polypropylene (PP)	1200	8
Polyacetal (POM)	2400	11

- Belt surface:** Raised ribs – drained – for the use of finger transfer plates.
- Open area:** 14 %. Biggest opening 10 x 2 mm.
- Strength:** Ideal for medium weight transportation.
- Material/colour:** PE/nat and blue, PP/white and grey. POM/blue.
- Cleanability:** Excellent. FSIS
- Accessories:** Finger transfer plates.
- Application:** Transport of small products, such as bottles, glass and machine components.
- Standard widths:** Increments of 10 mm, e.g. 100, 110 mm etc

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	64	45	36	20	20			
8	80	61	52	20	20/25	1	25	
12	114	95	86	20	20/25/30/40	1/1¼	25/40	1½/2½
20	179	160	151	35	25/30/40	1/1¼	25/40/60	1½

