


## S. 50-220

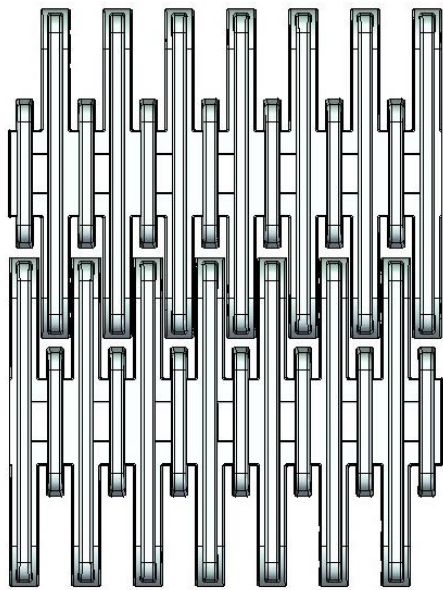

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polypropylene (PP)	2900	15
Polyacetal (POM)	4350	22,5

Belt surface:	Raised ribs – drained – for the use of finger transfer plates.
Open area:	27 %. Biggest opening 7.5 x 3.25 mm.
Strength:	Ideal for medium-heavy weight transportation.
Material/colour:	PP/ grey. POM/blue.
Cleanability:	Excellent. FSIS
Accessories:	Finger transfer plates.
Application:	Transport of medium products, such as bottles, cans and glass. Pasteurizer applications.
Standard widths:	Increments of 12.5 mm, e.g. 100, 112.5, 125 mm

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	121	89	73	20	20/25/30/40	¾/1/1¼	25 /40	1½
8	154	122	106	35	25/30/40	1/1¼	25/40	1½
10	188	156	140	35	25/30/40	1/1¼	25/40/60	1½/2½
12	221	189	173	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½
16	286	254	238	40	60/80		40/50/55/60/80	

