


S. 50-600

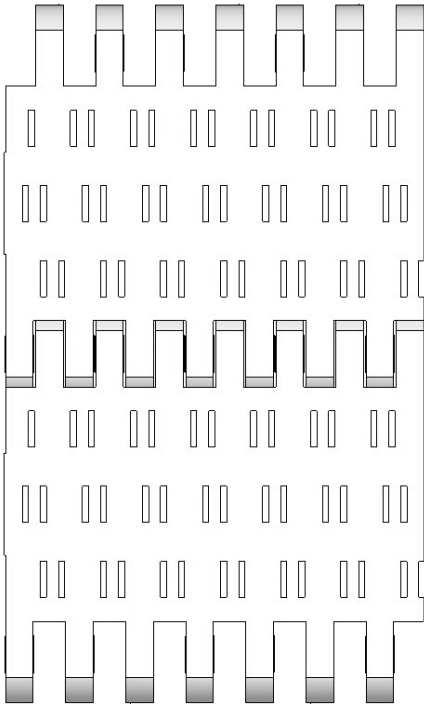

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	1790	7
Polypropylene (PP)	2400	7
Polyacetal (POM)	3600	10

Belt surface: Perforated flat top.
Open area: 9 %. Biggest opening 1 x 6 mm.
Strength: The right belt for medium-heavy transportation.
Material/colour: PE/nat and blue, PP/white and grey. POM/blue.
Cleanability: Excellent. FSIS.
Accessories: 25, 50, 75 and 100 mm flights. Scoop and bent flights. 75 and 150 mm supported flights. 50, 75, 100 and 150 mm side guards. 50 mm comb flights. Hold-down. Flights fitted with a round top. Friction top.
Application: Goods and other industries that handle products requiring drainage and very small openings.
Standard widths: Increments of 10 mm, e.g. 100, 110, 120 mm etc

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch-diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	103	89	73	20	20/25/30/40	¾/1/1¼	25 /40	1½
8	136	122	106	35	25/30/40	1/1¼	25/40	1½
10	170	156	140	35	25/30/40	1/1¼	25/40/60	1½/2½
12	203	189	173	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½
16	268	254	238	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½

