


S. 50-600F/2 component

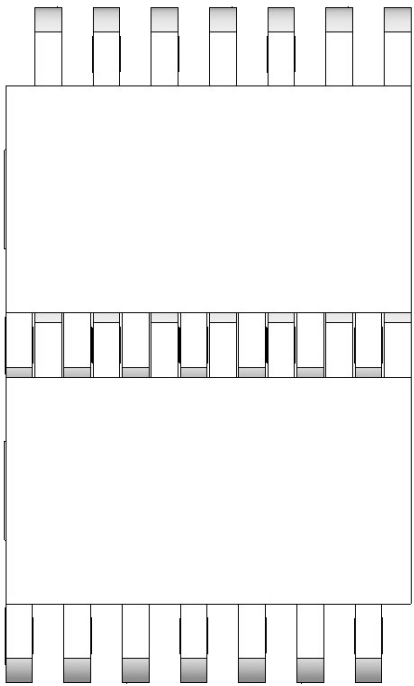

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Copolymer	2200	9,5

Belt surface: Closed belt with a friction surface.
Open area: Closed.
Strength: The right belt for medium-heavy transportation.
Colour: Nat/white
Cleanability: Good.FSIS
Accessories: 25, 50, 75 and 100 mm flights. Scoop and bent flights. 75 and 150 mm supported flights. 50, 75, 100 and 150 mm side guards. 50 mm comb flights. Flights fitted with a round top.
Application: Transport of goods on a slightly inclined conveyor.
Standard widths: Increments of 10 mm, e.g. 100, 110 mm etc

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	109	89	73	20	20/25/30/40	¾/1/1¼	25 /40	1½
8	142	122	106	35	25/30/40	1/1¼	25/40	1½
10	176	156	140	35	25/30/40	1/1¼	25/40/60	1½/2½
12	209	189	173	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½
16	274	254	238	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½

