


S. 50-701

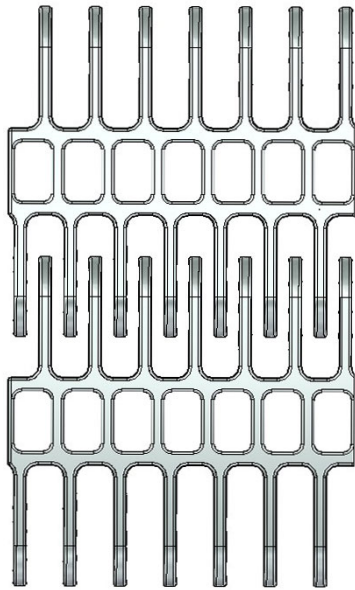

| Belt data | | |
|-------------------|---------------------------------|----------------------------------|
| Materials | Max. belt pull kg/m of width | Belt weight kg/m ² |
| Polyethylene (PE) | 420 | 3,5 |

| | |
|------------------|---|
| Belt surface: | Open belt with a smooth surface. |
| Open area: | 63 %. Biggest opening 7,5 x 12 mm. |
| Strength: | The right belt for light transportation. |
| Material/colour: | PE/nat, POM/nat. |
| Cleanability: | Excellent. FSIS. |
| Application: | Cooling/freezing belts for the seafood, bakery, vegetable industry etc. where large individual openings combined with evenly distributed airflow is required. |
| Standard widths: | Increments of 10 mm, e.g. 100, 110, 120 mm etc. |

| Sprocket Data | | | | | | | | |
|---------------|---------------------|-------------------|--------------------|------------|----------------|--------|-------------|-------|
| No. of teeth | A= Outside diameter | B= Pitch-diameter | C= Inside-diameter | Hub width: | Round bore | | Square bore | |
| | | | | | mm | in. | mm | in. |
| 6 | 105 | 89 | 73 | 20 | 20/25/30/40 | ¾/1/1¼ | 25 /40 | 1½ |
| 8 | 138 | 122 | 106 | 35 | 25/30/40 | 1/1¼ | 25/40 | 1½ |
| 10 | 172 | 156 | 140 | 35 | 25/30/40 | 1/1¼ | 25/40/60 | 1½/2½ |
| 12 | 205 | 189 | 173 | 35 | 25/30/40/50/60 | 1/1¼ | 25/40/60 | 1½/2½ |
| 16 | 270 | 254 | 238 | 35 | 25/30/40/50/60 | 1/1¼ | 25/40/60 | 1½/2½ |

