


S. 50-805

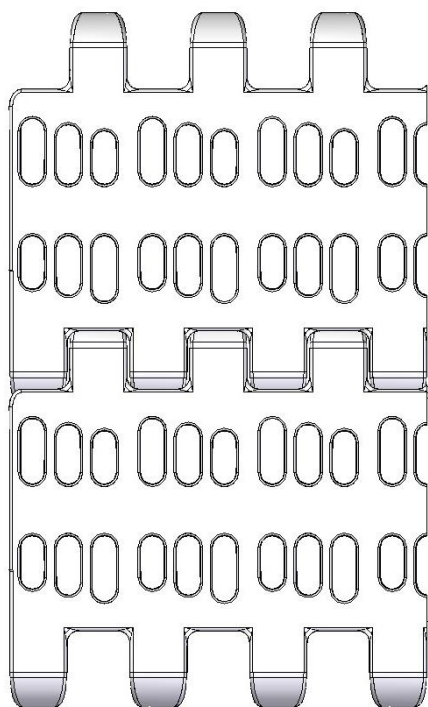

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m
Polyethylene (PE)	1200	7
Polypropylene (PP)	1400	7
Polyacetal (POM)	2060	10

Belt surface:	Open belt with a smooth surface
Open area:	26 %. Biggest opening 4 x 11 mm
Strength:	The right belt for medium-heavy transportation.
Material/colour:	PE/nat and blue, PP/white and grey. POM/blue.
Cleanability:	Excellent. FSIS.
Accessories:	25, 50, 75 and 100 mm flights. 75 and 150 mm supported flights. Scoop and bent flights. 50, 75, 100 and 150 mm side guards. Hold-down.
Application:	Flights fitted with a round top. Medium-heavy duty transportation requiring drainage. Seafood, dairy, vegetables, poultry, snacks, sweet goods and other industries requiring high degree of cleanability. Increments of 20 mm, e.g. 100,
Standard widths:	120 mm etc.

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch-diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	102	89	73	20	20/25/30/40	¾/1/1¼	25 /40	1½
8	136	122	106	35	25/30/40	1/1¼	25/40	1½
10	171	156	140	35	25/30/40	1/1¼	25/40/60	1½/2½
12	205	189	173	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½

