


S. 50-808 F2

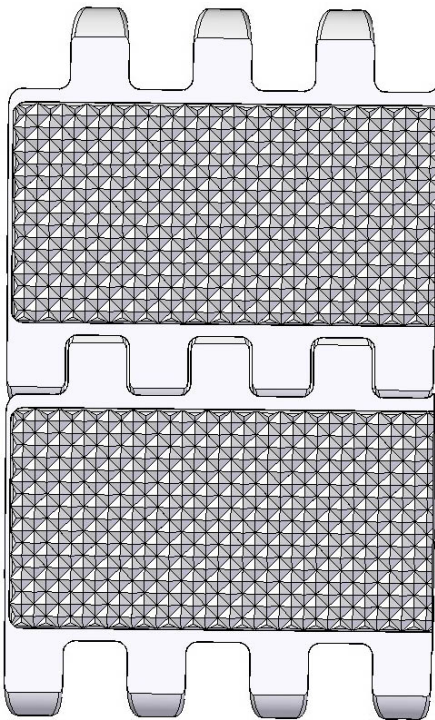

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Copolymer	1350	9

Belt surface:	Closed belt with friction top.
Open area:	Closed.
Strength:	The right belt for medium-heavy transportation.
Material/colour:	PE/nat and blue, PP/white and grey. POM/blue.
Cleanability:	Excellent.
Accessories:	25, 50, 75 and 100 mm flights. 75 and 150 mm supported flights. Scoop and bent flights. 50, 75, 100 and 150 mm side guards. Hold-down.
Application:	Flights fitted with a round top. Transport of goods on a slightly inclined conveyor.
Standard widths:	Increments of 20 mm, e.g. 100, 120 mm etc.

Protected by the EU Design Registration

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch-diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	111	89	73	20	20/25/30/40	¾/1/1¼	25 /40	1½
8	144	122	106	35	25/30/40	1/1¼	25/40	1½
10	178	156	140	35	25/30/40	1/1¼	25/40/60	1½/2½
12	211	189	173	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½

