


S. 50-838

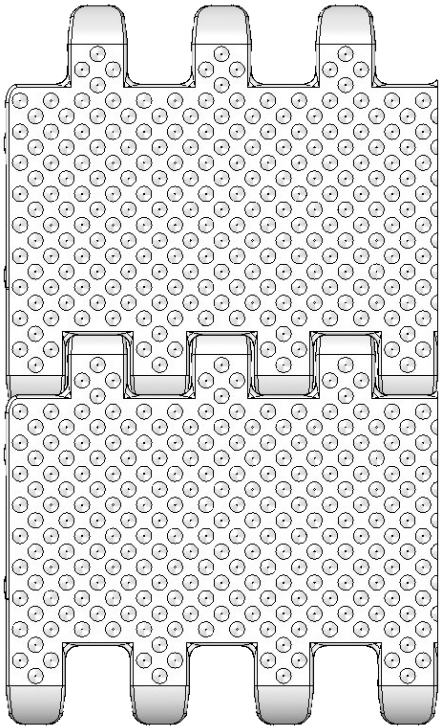

Registered Trademark ®

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	1200	8
Polypropylene (PP)	1400	8
Polyacetal (POM)	2060	12

Belt surface: Structure top with 3 mm cones.
Open area: Closed.
Strength: The right belt for medium-heavy transportation. PE/ nat and blue, PP/white and grey. POM/blue.
Material/colour: PE/ nat and blue, PP/white and grey. POM/blue.
Cleanability: Excellent. FSIS.
Accessories: 25, 50, 75 and 100 mm flights. 75 and 150 mm supported flights. Scoop and bent flights. 50, 75, 100 and 150 mm side guards. Hold-down. Flights fitted with a round top.
Application: Seafood, red meat, vegetable, sweets etc.
Standard widths: Increments of 20 mm, e.g. 100, 120 mm etc

Sprocket Data								
No. of teeth	A= Outside diameter	B= Pitch-diameter	C= Inside-diameter	Hub width:	Round bore		Square bore	
					mm	in.	mm	in.
6	108	89	73	20	20/25/30/40	¾/1/1¼	25 /40	1½
8	142	122	106	35	25/30/40	1/1¼	25/40	1½
10	176	156	140	35	25/30/40	1/1¼	25/40/60	1½/2½
12	209	189	173	35	25/30/40/50/60	1/1¼	25/40/60	1½/2½

