



straight running plate top chains

1864 SERIES

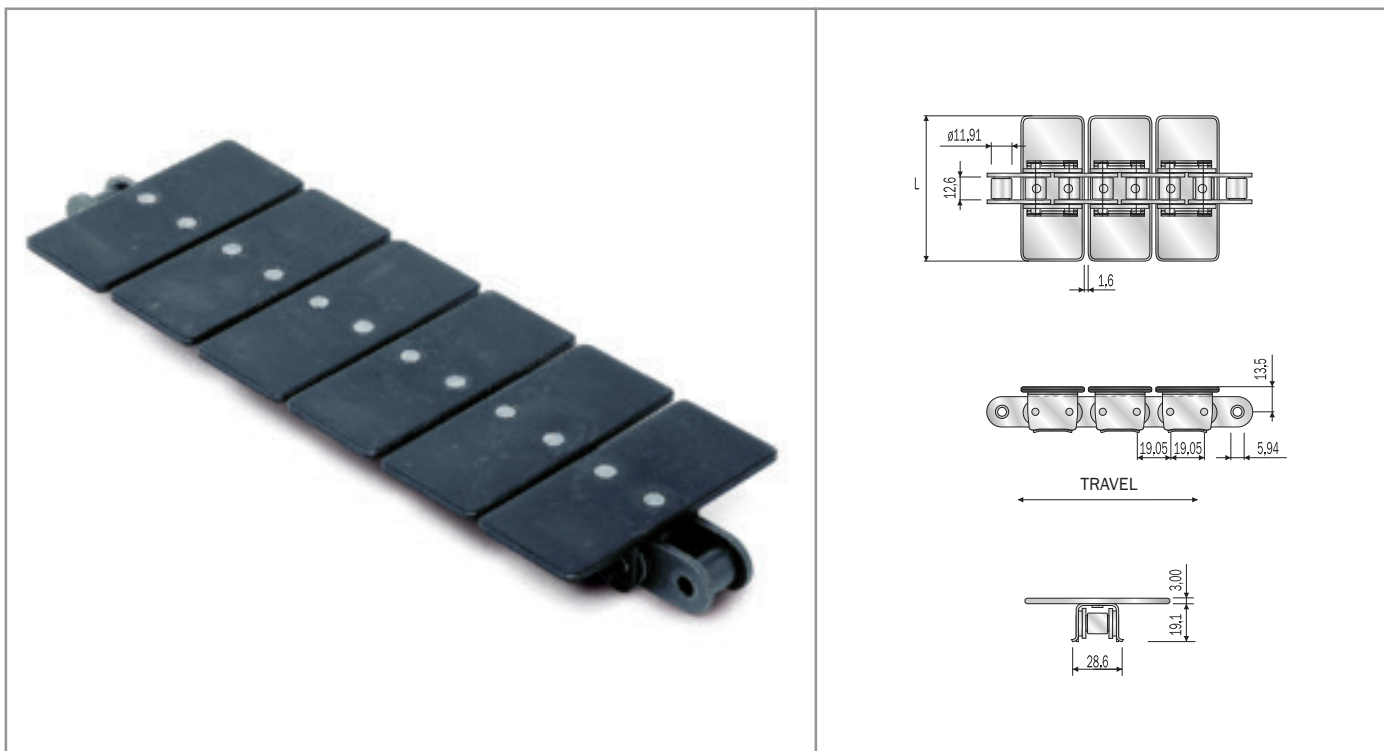

1864

- This high speed, high capacity series offers better efficiency and reliability in applications where high temperatures or abrasive materials are involved.
- Steel and stainless steel top plates.
- Base roller chain, 19,05 mm - 3/4" pitch ANSI 60.



PRODUCT CODE	INTERNAL CODE	CHARACTERISTICS		
		Slat width (mm)	Ultimate strenght (N)	Weight kg/m
1864 K325	1864.CC.041	82.5	37000	3.33
1864 K450	1864.CC.081	114.3	37000	4.00
1864 K600	1864.CC.101	152.4	37000	5.33
1864 K750	1864.CC.111	190.5	37000	5.68
1864 A K325	1864.CS.041	82.5	37000	3.33
1864 A K450	1864.CS.081	114.3	37000	4.00
1864 A K600	1864.CS.101	152.4	37000	5.33
1864 A K750	1864.CS.111	190.5	37000	5.68
1864 SS K325	1864.SS.041	82.5	26000	3.33
1864 SS K450	1864.SS.081	114.3	26000	4.00
1864 SS K600	1864.SS.101	152.4	26000	5.33
1864 SS K750	1864.SS.111	190.5	26000	5.68

NOTE ON MATERIALS

1864 - steel base roller chain, steel top plate.

1864 A - steel base roller chain, stainless steel top plate.

1864 SS - stainless steel base roller chain, stainless steel top plate.