


NEW S.12-448 BELT

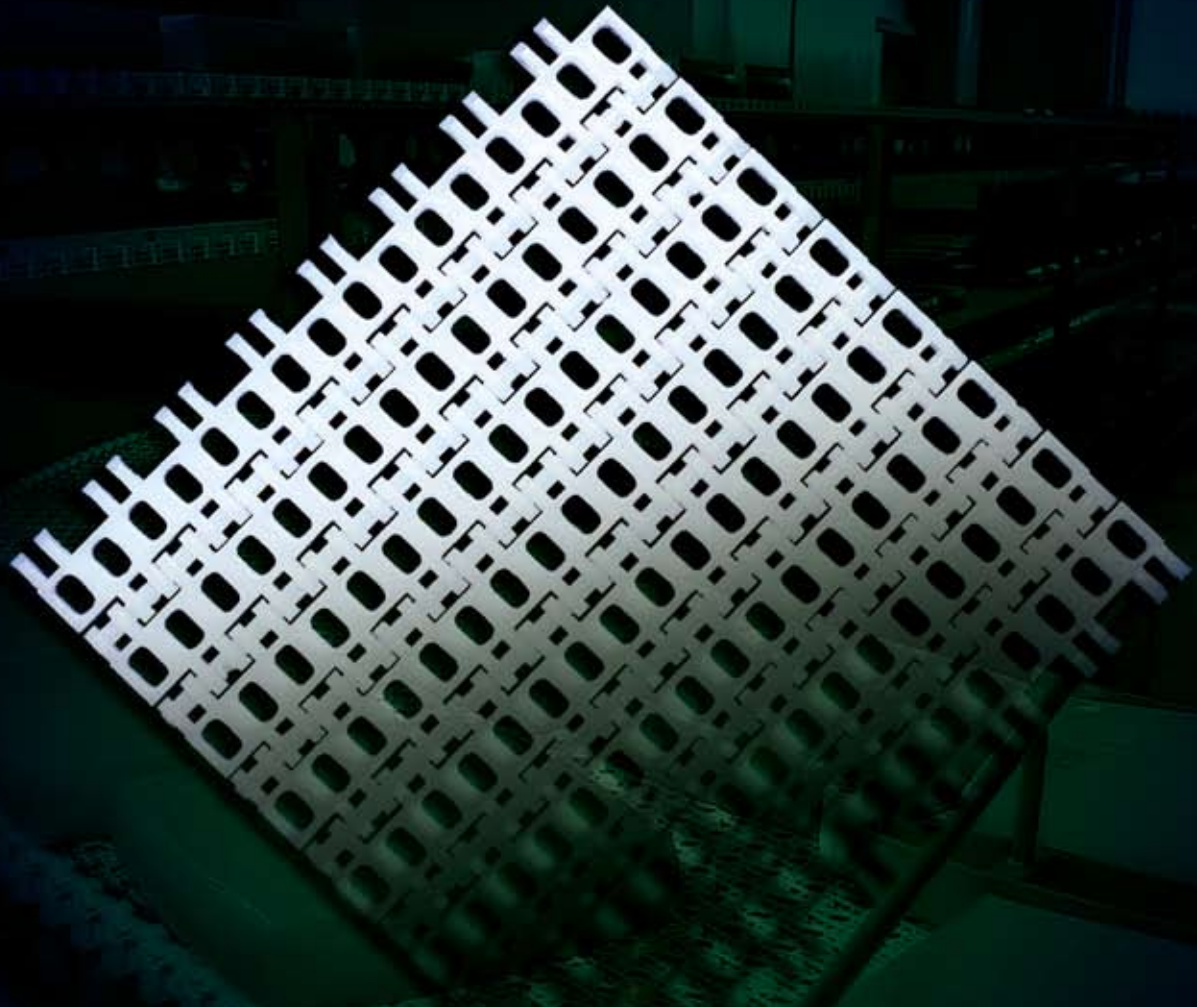

**SCANBELT**  
...keeping industry moving...


## Proofing has never been easier

The new S.12-448 “Inverted Diamond Top” minipitch belt has been designed particularly for the bakery industry. The Inverted Diamond Top pattern on the belt makes it ideal for PROOFING, since it provides excellent conditions for bread and pastry to rise at room temperature after it has been shaped.




### By using the new ScanBelt S12-448 Inverted Diamond Top, you can:

- Increase the product yield with special non-stick surface that are FDA/USDA approved for direct contact.
- Achieve an easy product release with the the non-stick surface and combined with the structure pattern.
- Minimize the transfer dead plate gap due to the lightly curved surface.
- Run on nose bars down to 14 mm due to design on the underside of the belt
- Minimize wear on the rods in the belts by using the special abrasion resistant rods.

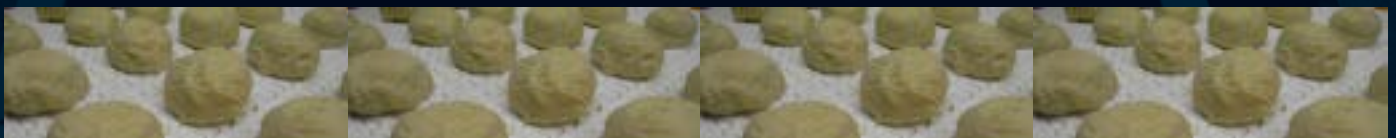

# S. 12-448

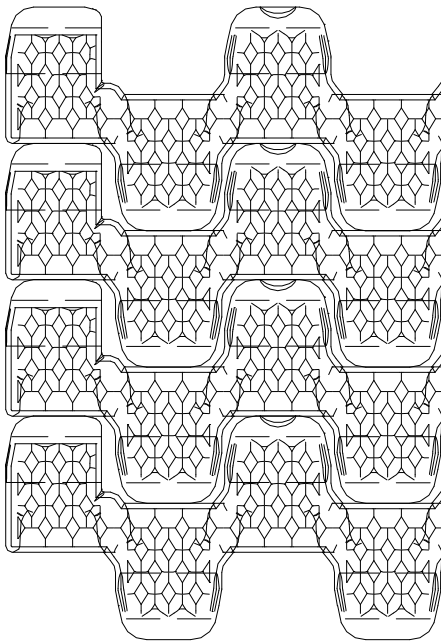


Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	600	4,5
Polypropylene (PP)	800	4,5
Polyacetal (POM)	1450	6

**Belt surface:** Closed top with an inverted diamond pattern  
**Open area:** Closed.  
**Strength:** Ideal choice for light transportation.  
**Material/colour:** PE/nat and PP/white  
**Cleanability:** Excellent. FSIS  
**Accessories:** 25 mm flights, friction top.  
**Application:** Proofing belt for raw dough. The inverted diamond pattern ensures easy product release.  
**Standard widths:** Increments of 20 mm, e.g. 100, 120 mm etc

(1:1)

Sprocket data			
No. of teeth Z	A= Outside diameter mm.	B= Pitch diameter mm.	C= Inside diameter mm.
10	50	42	33
19	84	76	67
24	104	96	87
28	120	112	103

Hub specifications				
Hub width 16 mm	No. of teeth			
	10Z	19Z	24Z	28Z
Round bore mm.	ø20	ø20 ø25 ø30 ø40	ø20 ø25 ø30 ø40	ø20 ø25 ø30 ø40
Square bore mm.		25x25 40x40	25x25 40x40	25x25 40x40

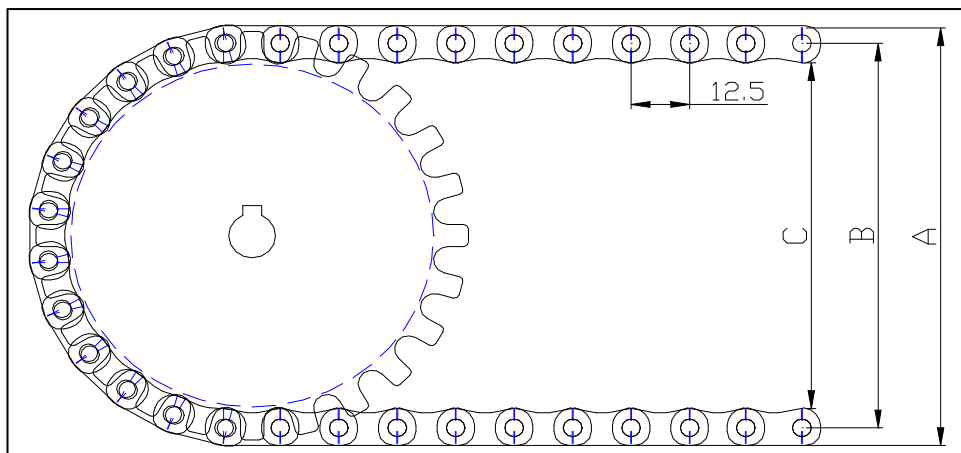



Worldwide Coverage

**SCANBELT**  
...keeping industry moving...

Læsøvej 12 • DK-9800 Hjørring  
Tlf. +45 98 90 90 88 • Fax +45 98 90 96 06  
[www.scanbelt.com](http://www.scanbelt.com) • [mail@scanbelt.com](mailto:mail@scanbelt.com)

