


MUC




Designation example

MUC — ANB insert
206 — Size

Housing number	Shaft diameter	Dimensions (mm)										Weight (Kg.)	Basic load rating (n)	
		mm.	D	Bi	Be	r	n	m	G	ds	T		Dynamic Cr	Static Cor
MUC201	12	47	31	17	1	12,7	18,3	4,5	M6X0,75	4,5	29	0,21	10900	5300
MUC202	15	47	31	17	1	12,7	18,3	4,5	M6X0,75	4,5	29	0,19	10900	5300
MUC203	17	47	31	17	1	12,7	18,3	4,5	M6X0,75	4,5	29	0,18	10900	5300
MUC204	20	47	31	17	1	12,7	18,3	4,5	M6X0,75	4,5	29	0,15	10900	5300
MUC205	25	52	34	17	1,5	14,3	19,8	8	M6X0,75	4,5	34	0,19	11900	6300
MUC206	30	62	38,1	19	1,5	15,9	22,2	5	M6X0,75	5,1	40,5	0,31	16700	9050
MUC207	35	72	42,9	20	2	17,5	25,4	6	M8X1	5,8	48	0,48	22000	12300
MUC208	40	80	49,2	21	2	19	30,2	8	M8X1	6,2	53	0,62	24900	14300
MUC209	45	85	49,2	22	2	19	30,2	8	M8X1	6,5	57,3	0,67	28100	16400
MUC210	50	90	51,6	23	2	19	32,6	9	M810X1,25	6,5	63	0,78	30200	18600

Alternative: stainless steel bearing SS UC available (Chinese version)

MB

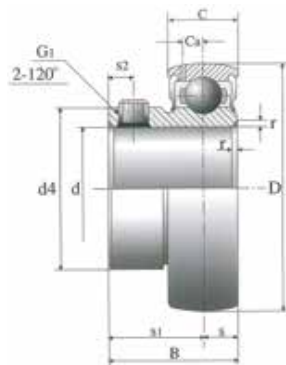

Designation example

MB — ANB insert
204 — Size


Housing number	Shaft diameter	Dimensions (mm)											Weight	Basic load rating (n)	
														Dynamic Cr	Static Cor
	mm.	d	D	B	C	r	s	s1	s2	G1	Ca	d4	(Kg.)	mm.	
MB204	20	20	47	25	14	1,5	7	18	4	M6X0,75	4	28,3	0,125	10900	5300
MB205	25	25	52	27	15	1,5	7,5	19,5	4,2	M6X0,75	4,2	34	0,160	11900	6300
MB206	30	30	62	30	16	1,5	8	22	5	M6X0,75	5	40,3	0,250	16700	9000
MB207	35	35	72	32	17	2	8,5	23,5	5,6	M8X1	5,6	46,9	0,380	22000	12300
MB208	40	40	80	34	18	2	9	25	6	M8X1	6	52,4	0,490	24900	14300
MB209	45	45	85	41,2	19	2	10,2	31,7	6,3	M8X1	6,3	57,4	0,56	26000	16300
MB210	50	50	90	43,5	20	2	10,9	33,5	8	M8X1	6,6	61,8	0,62	28000	18000

Special for use with back seal.

Alternative: stainless steel bearing SS SB available (Chinese version)

Designation example

UC — ANB insert
208 — Size



UC

Housing number	Shaft diameter	Dimensions (mm)									Weight	Basic load rating (n)		
												Dynamic Cr	Static Cor	
	mm.	D	Bi	Be	r	n	m	G	ds	T	W	(Kg.)	mm.	
UC204	20	47	31	17	1	12,7	18,3	4,5	M6X0,75	4,5	29	0,16	12850	6670
UC205	25	52	34	17	1,5	14,3	19,8	5	M6X0,75	4,5	34	0,19	14028	7848
UC206	30	62	38,1	19	1,5	15,9	22,2	5	M6X0,75	5,1	40,5	0,30	19620	11280
UC207	35	72	42,9	20	2	17,5	25,4	6	M8X1	5,8	48	0,48	25898	15400
UC208	40	80	49,2	21	2	19	30,2	8	M8X1	6,2	53	0,62	29330	17950
UC209	45	85	49,2	22	2	19	30,2	8	M8X1	6,5	57,3	0,67	32860	20500
UC210	50	90	51,6	23	2	19	32,6	9	M810X1,25	6,5	63	0,78	35315	23249

Alternative: steel bearing B (flat on the back)

Plastic insert - under water units



- No maintenance
- Chemical resistant
- Easily cleaned smooth surface

Material


- PNS: Delrin
- UC200P: Acetal and 316
- Stainless Steel balls



Plastic Insert

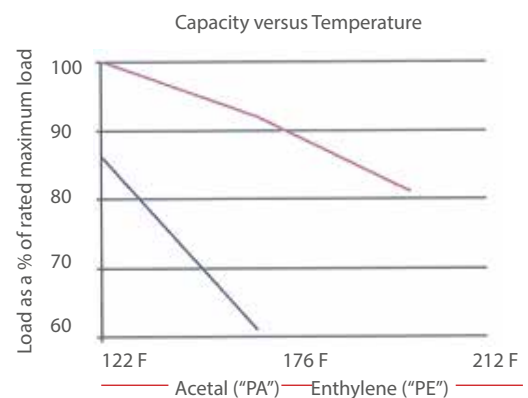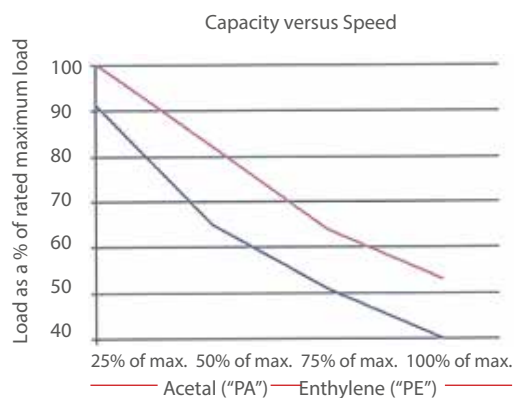


UCP



Housing number	d	D	Bi	Be	m	n	Load capacity single row (N)		max. speed single row
	mm.	mm.	mm.	mm.	mm.	mm.	stat.	dyn	rpm
UC204P	20	47	31,0	17	18,3	12,7	270	420	1050
UC205P	25	52	34,1	17	19,6	14,5	320	480	950
UC206P	30	68	38,1	19	22,2	15,9	360	550	800

PNS

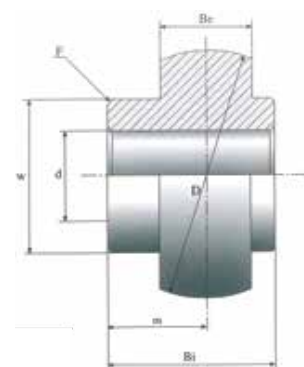

Housing number	Dimensions (mm)							
	d	tol.	D	Bi	m	Be	w	F
PNS204	20		47	31	18,3	17	29	1,5
PNS205	25	+0,04	52	34	19,7	17	34	1,5
PNS206	30	+0,08	62	38,1	22,2	19	40,5	1,5
PNS207	35	+0,05	72	42,9	25,4	20	48	1,5
PNS208	40	+0,10	80	49,2	30,2	21	53	1,5
PNS209	45	+0,06	85	49,2	30,2	22	57,3	1,5
PNS210	50	+0,12	90	51,6	32,6	23	63	1,5