


sideflexing chains

WITH THERMOPLASTIC TOP PLATES - 1843 TAB SERIES

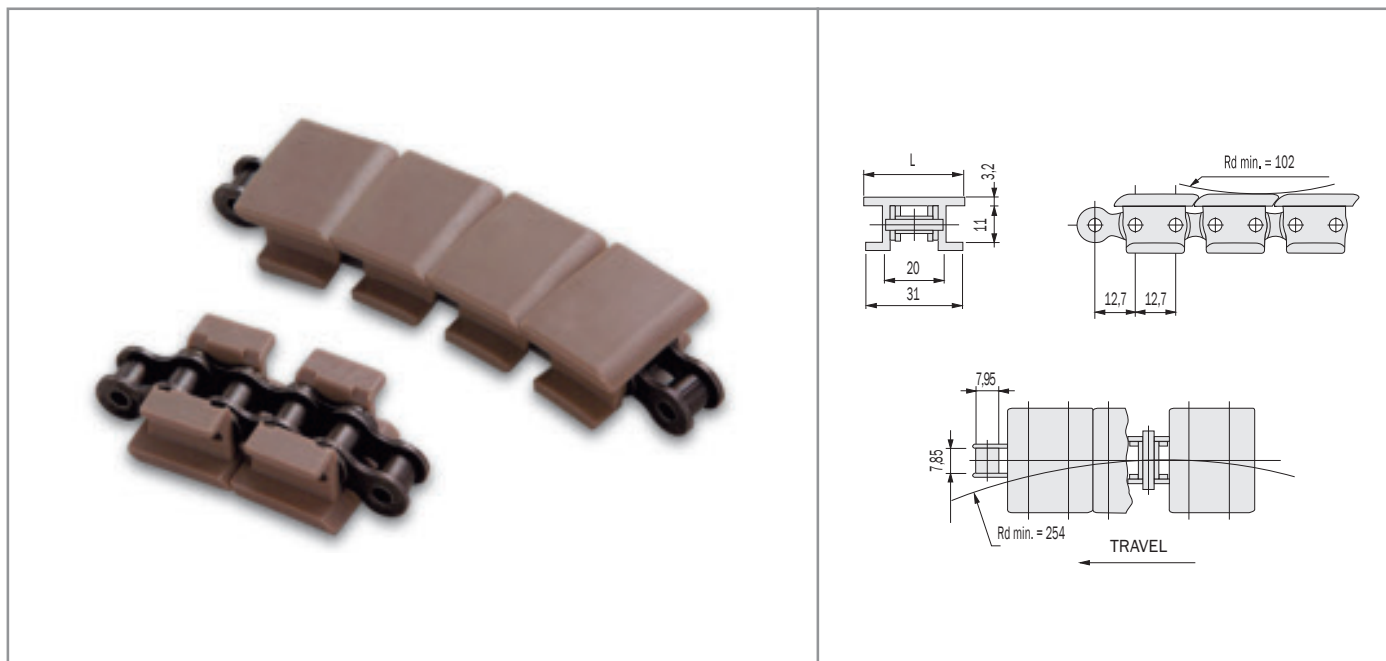

LFA 1843 TAB - LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Base roller chain, 12.7 mm - 1/2" pitch. - ANSI 43 SB




PRODUCT CODE	INTERNAL CODE	CHARACTERISTICS			
		Base roller chain	Width L (mm)	Breaking Load N	Weight kg/m
LFA 1843 TAB K125	1843.AC.280	steel	31.8	13000	0.74
LFA 1843 TAB K200	1843.AC.010	steel	50.8	13000	0.89
LFA 1843 TAB K325	1843.AC.041	steel	82.5	13000	1.03
LFA 1843 TAB SS K125	1843.AS.280	stainless steel	31.8	10000	0.74
LFA 1843 TAB SS K200	1843.AS.010	stainless steel	50.8	10000	0.89
LFA 1843 TAB SS K325	1843.AS.041	stainless steel	82.5	10000	1.03

- Standard shipping lengths = 240 pitches = 10 feet = 3,048 metres.

sideflexing chains

WITH THERMOPLASTIC TOP PLATES - 1863 TAB SERIES

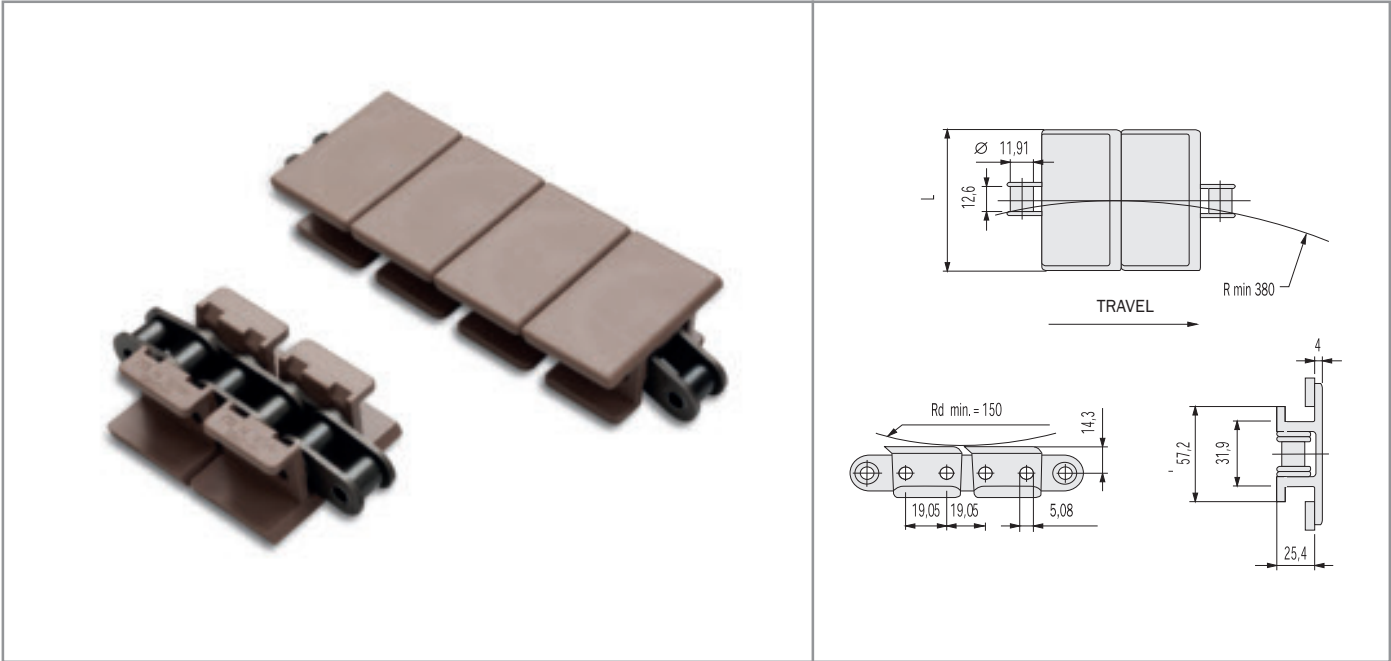

LFA 1863 TAB - LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Base roller chain, 19.05 mm - 3/4" pitch. - ANSI 63 SB





p.214

p.225


p.228

PRODUCT CODE		INTERNAL CODE		CHARACTERISTICS	
		Base roller chain	Width L (mm)	Breaking Load N	Weight kg/m
LFA 1863 TAB K225	1863.AC.016	steel	57.1	27000	2.00
LFA 1863 TAB SS K225	1863.AS.016	stainless steel	57.1	21000	2.00

- Standard shipping lengths = 160 pitches = 10 feet = 3,048 metres.

sideflexing chains

WITH THERMOPLASTIC TOP PLATES - 1873 TAB SERIES

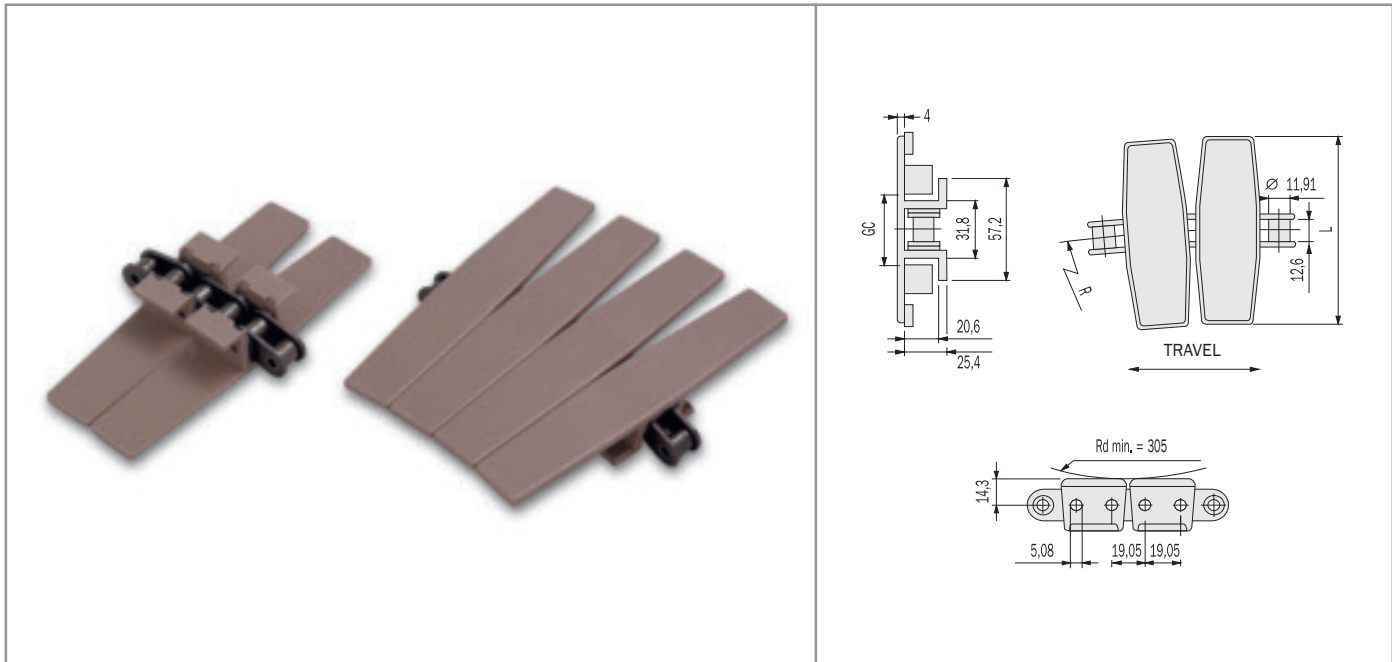

LFA 1873 TAB - LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Base roller chain, 19.05 mm - 3/4" pitch. - ANSI 63 SB



p.214



p.225



p.228

PRODUCT CODE	INTERNAL CODE	CHARACTERISTICS						
		Base roller chain	Width L (mm)	Radius R (mm)	GC st. (mm)	GC sid. (mm)	Breaking Load N	Weight kg/m
LFA 1873 TAB K325	1873.AC.041	steel	82.5	356	33.3	34.6	27000	2.10
LFA 1873 TAB K450	1873.AC.081	steel	114.3	356	33.3	34.6	27000	2.30
LFA 1873 TAB K600	1873.AC.101	steel	152.4	457	33.3	34.6	27000	2.40
LFA 1873 TAB K750	1873.AC.111	steel	190.5	457	33.3	34.6	27000	2.60
LFA 1873 TAB K1000	1873.AC.121	steel	254.0	457	33.3	34.6	27000	2.80
LFA 1873 TAB K1200	1873.AC.131	steel	304.8	610	33.3	34.6	27000	3.00
LFA 1873 TAB SS K325	1873.AS.041	stainless steel	82.5	356	33.3	34.6	21000	2.10
LFA 1873 TAB SS K450	1873.AS.081	stainless steel	114.3	356	33.3	34.6	21000	2.30
LFA 1873 TAB SS K600	1873.AS.101	stainless steel	152.4	457	33.3	34.6	21000	2.40
LFA 1873 TAB SS K750	1873.AS.111	stainless steel	190.5	457	33.3	34.6	21000	2.60
LFA 1873 TAB SS K1000	1873.AS.121	stainless steel	254.0	457	33.3	34.6	21000	2.80
LFA 1873 TAB SS K1200	1873.AS.131	stainless steel	304.8	610	33.3	34.6	21000	3.00

- Standard shipping lengths = 160 pitches = 10 feet = 3,048 metres.