


straight running chains

WITH THERMOPLASTIC TOP PLATES - 843 SERIES

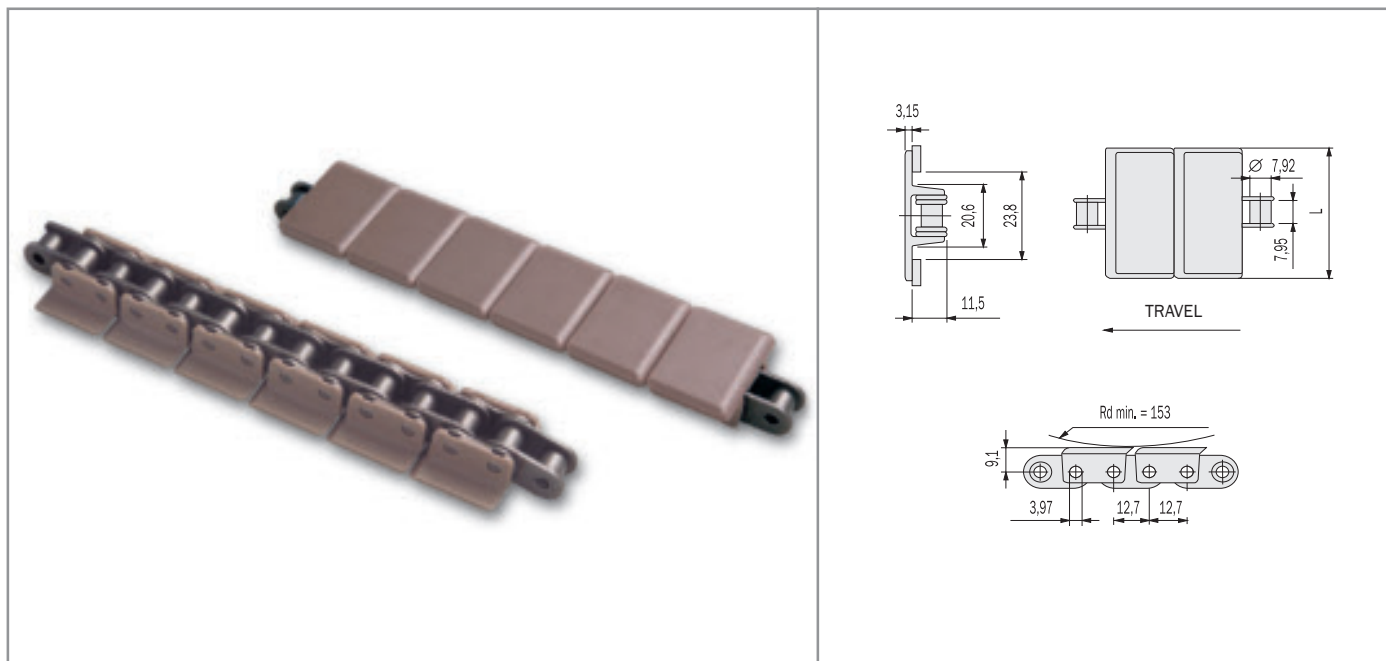

LFA 843 - LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Base roller chain, 12.7 mm - 1/2" pitch. - ANSI 43




PRODUCT CODE	INTERNAL CODE	CHARACTERISTICS			
		Base roller chain	Width L (mm)	Breaking Load N	Weight kg/m
LFA 843 K138	843.AC.138	steel	34.9	16900	0.83
LFA 843 K144	843.AC.144	steel	36.5	16900	0.84
LFA 843 K200	843.AC.010	steel	50.8	16900	0.89
LFA 843 K250	843.AC.020	steel	63.5	16900	0.92
LFA 843 K275*	843.AC.200	steel	69.9	16900	0.94
LFA 843 K325	843.AC.040	steel	82.5	16900	1.03
LFA 843 SS K138	843.AS.138	stainless steel	34.9	10700	0.83
LFA 843 SS K144	843.AS.144	stainless steel	36.5	10700	0.84
LFA 843 SS K200	843.AS.010	stainless steel	50.8	10700	0.89
LFA 843 SS K250	843.AS.020	stainless steel	63.5	10700	0.92
LFA 843 SS K275*	843.AS.200	stainless steel	69.9	10700	0.94
LFA 843 SS K325	843.AS.040	stainless steel	82.5	10700	1.03

* Size produced only upon request. Delivery conditions and terms to be agreed.
 - Standard shipping lengths = 240 pitches = 10 feet = 3,048 metres.

straight running chains

WITH THERMOPLASTIC TOP PLATES - 845 SERIES

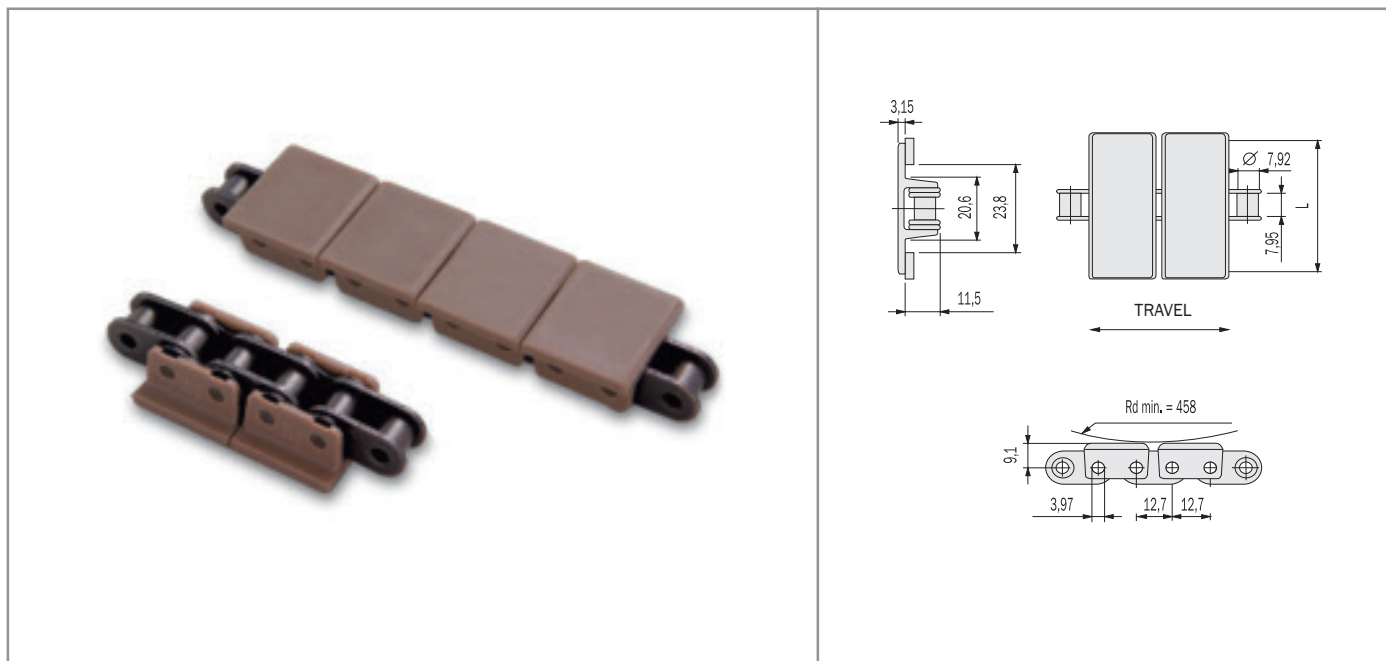

LFA 845 - LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Base roller chain, 12.7 mm - 1/2" pitch. - ANSI 43




PRODUCT CODE	INTERNAL CODE	CHARACTERISTICS			
		Base roller chain	Width L (mm)	Breaking Load N	Weight kg/m
LFA 845 K118*	845.AC.118	steel	28.6	16900	0.85
LFA 845 K138	845.AC.138	steel	34.9	16900	0.89
LFA 845 K200*	845.AC.010	steel	50.8	16900	0.99
LFA 845 SS K118*	845.AS.118	stainless steel	28.6	10700	0.85
LFA 845 SS K138*	845.AS.138	stainless steel	34.9	10700	0.89
LFA 845 SS K200*	845.AS.010	stainless steel	50.8	10700	0.99

* Size produced only upon request. Delivery conditions and terms to be agreed.
 - Standard shipping lengths = 240 pitches = 10 feet = 3,048 metres.

straight running chains

WITH THERMOPLASTIC TOP PLATES - 863 SERIES

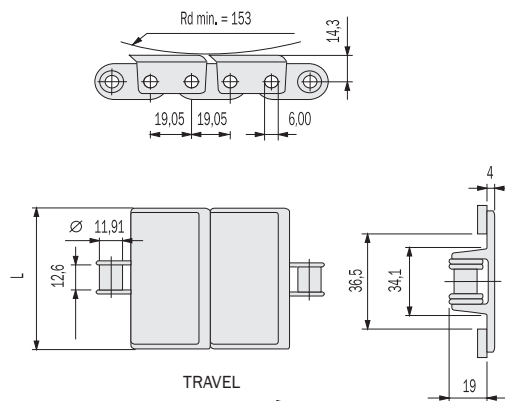

LFA 863 - LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Base roller chain, 19.05 mm - 3/4" pitch. - ANSI 63




PRODUCT CODE	INTERNAL CODE	CHARACTERISTICS			
		Base roller chain	Width L (mm)	Breaking Load N	Weight kg/m
LFA 863 K175*	863.AC.300	steel	44.5	37000	1.8
LFA 863 K225	863.AC.015	steel	57.1	37000	1.9
LFA 863 K250*	863.AC.020	steel	63.5	37000	2.0
LFA 863 K325	863.AC.040	steel	82.5	37000	2.1
LFA 863 K450	863.AC.080	steel	114.3	37000	2.3
LFA 863 K600	863.AC.100	steel	152.4	37000	2.5
LFA 863 K750	863.AC.110	steel	190.5	37000	2.7
LFA 863 SS K175*	863.AS.300	stainless steel	44.5	26000	1.8
FA 863 SS K225	863.AS.015	stainless steel	57.1	26000	1.9
LFA 863 SS K250*	863.AS.020	stainless steel	63.5	26000	2.0
LFA 863 SS K325	863.AS.040	stainless steel	82.5	26000	2.1
LFA 863 SS K450	863.AS.080	stainless steel	114.3	26000	2.3
LFA 863 SS K600	863.AS.100	stainless steel	152.4	26000	2.5
LFA 863 SS K750	863.AS.110	stainless steel	190.5	26000	2.7

* Size produced only upon request. Delivery conditions and terms to be agreed.
 - Standard shipping lengths = 160 pitches = 10 feet = 3,048 metres.

straight running chains

WITH THERMOPLASTIC TOP PLATES - 863 TAB SERIES

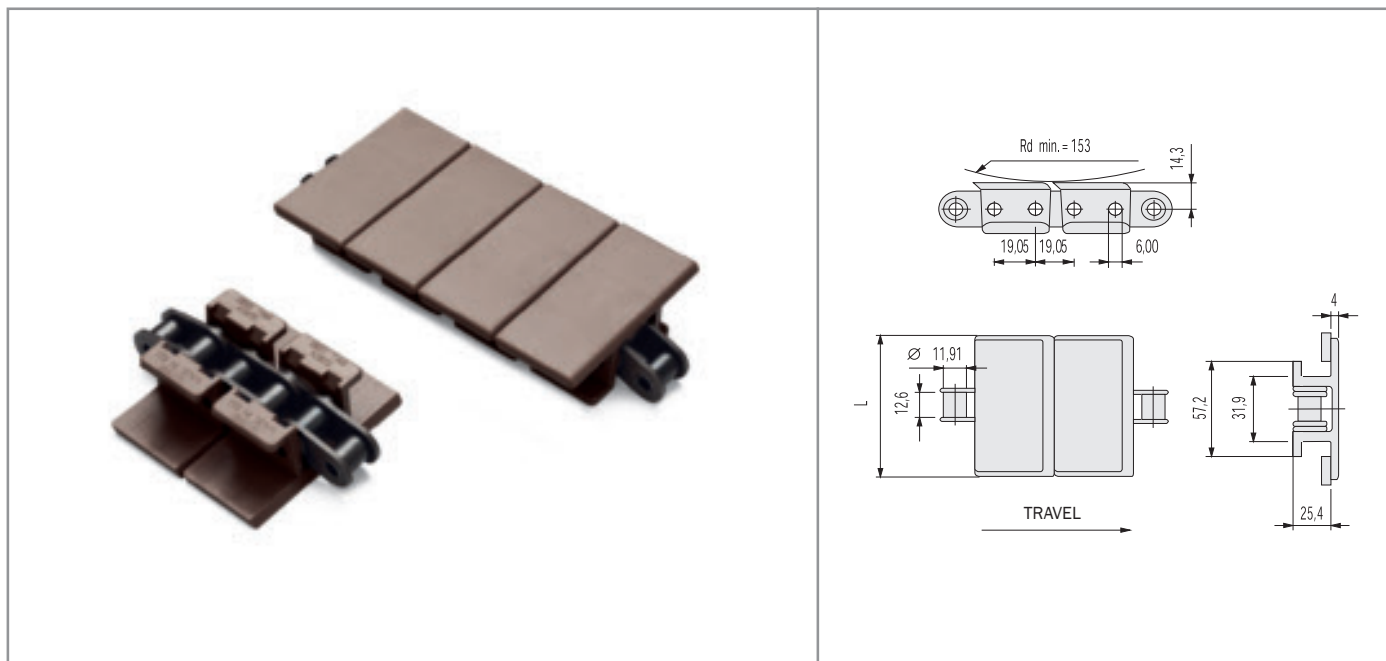

LFA 863 TAB - LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Base roller chain, 19.05 mm - 3/4" pitch. - ANSI 63 SB




PRODUCT CODE	INTERNAL CODE	CHARACTERISTICS			
		Base roller chain	Width L (mm)	Breaking Load N	Weight kg/m
LFA 863 TAB K250	863.AC.021	steel	63.5	27000	2.10
LFA 863 TAB K325	863.AC.041	steel	82.5	27000	2.20
LFA 863 TAB K450	863.AC.081	steel	114.3	27000	2.40
LFA 863 TAB K600	863.AC.101	steel	152.4	27000	2.60
LFA 863 TAB K1000	863.AC.121	steel	254.0	27000	3.10
LFA 863 TAB SS K250	863.AS.021	stainless steel	63.5	21000	2.10
LFA 863 TAB SS K325	863.AS.041	stainless steel	82.5	21000	2.20
LFA 863 TAB SS K450	863.AS.081	stainless steel	114.3	21000	2.40
LFA 863 TAB SS K600	863.AS.101	stainless steel	152.4	21000	2.60
LFA 863 TAB SS K1000	863.AS.121	stainless steel	254.0	21000	3.10

- Standard shipping lengths = 160 pitches = 10 feet = 3,048 metres.

straight running chains

WITH THERMOPLASTIC TOP PLATES - 963 SERIES

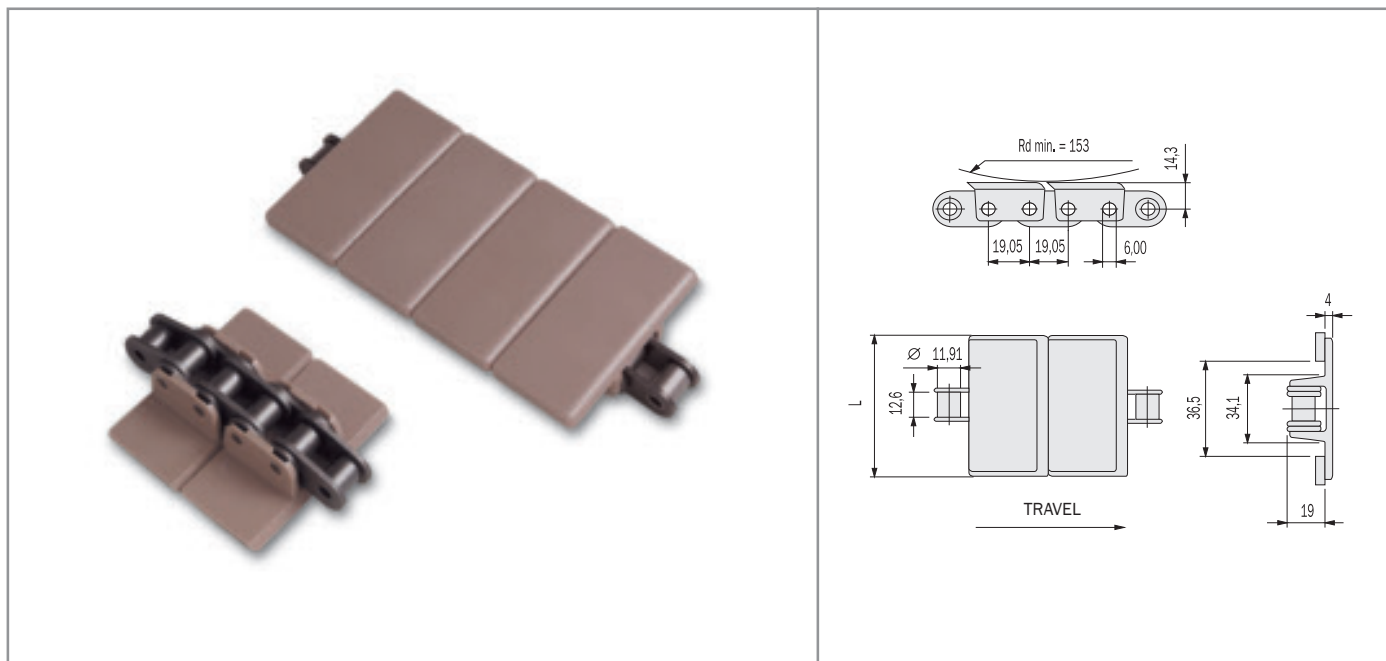

LFA 963 - LOW FRICTION ACETAL RESIN

- Plates in self-lubricating low friction acetal resin, light brown-coloured.
- Base roller chain, 19.05 mm - 3/4" pitch. - ANSI 63



PRODUCT CODE	INTERNAL CODE	CHARACTERISTICS			
		Base roller chain	Width L (mm)	Breaking Load N	Weight kg/m
LFA 963 K325	963.AC.040	steel	82.5	37000	2.10
LFA 963 K450	963.AC.080	steel	114.3	37000	2.23
LFA 963 K600	963.AC.100	steel	152.4	37000	2.53
LFA 963 K750	963.AC.110	steel	190.5	37000	2.68
LFA 963 SS K325	963.AS.040	stainless steel	82.5	26000	2.10
LFA 963 SS K450	963.AS.080	stainless steel	114.3	26000	2.23
LFA 963 SS K600	963.AS.100	stainless steel	152.4	26000	2.53
LFA 963 SS K750	963.AS.110	stainless steel	190.5	26000	2.68

- Standard shipping lengths = 160 pitches = 10 feet = 3,048 metres.